

## **CORNER FRAME**







→ corner aluminium frame – general view

- → made of extruded aluminium, non-welded, assembled by corner connectors
- → equipped with a rubber gasket, factory- fitted
- → equipped with intumescent gasket for fire doors or EPDM gasket for non-fire doors; installed on site
- → resistant to corrosion in humid conditions
- → powder coated to any RAL palette colour

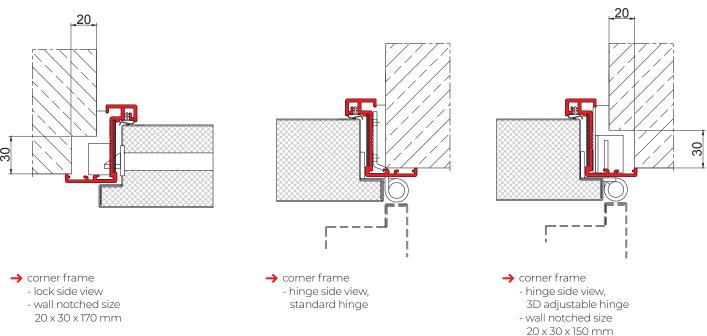



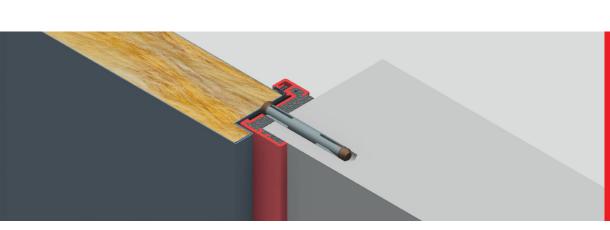


the same model for doors DFM DS 00 DFM DS 30 **DFM DS 30B** DFM DS 60 DFM OS 00

NOTE! Door frame and installation gap to be duly filled, in accordance with certificate

20.**2.1.1** 


#### **EMBRACING FRAME**






embracing aluminium frame - general view


- → made of extruded aluminium, non-welded, assembled by corner connectors
- → composed of two parts: base element and embracing part made of aluminium or steel depending on wall thickness
- → equipped with a rubber gasket, factory- fitted
- → equipped with intumescent gasket for fire doors or EPDM gasket for non-fire doors; installed on site
- → resistant to corrosion in humid conditions
- → powder coated to any RAL palette colour




- → embracing frame
  - lock side view
  - wall notched size 20 x 30 x 170 mm



- hinge side view, standard hinge




- → embracing frame
  - hinge side view, 3D adjustable hinge
  - wall notched size 20 x 30 x 150 mm

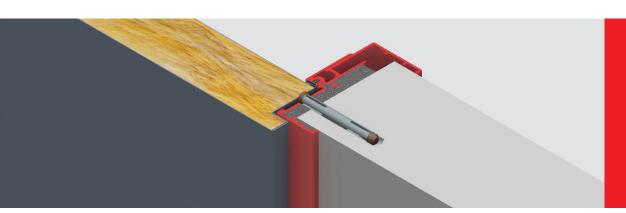

the same model for doors DFM DS 00 **DFM DS 30** DFM DS 30B DFM DS 60 DFM OS 00


#### **BLOCK FRAME**






→ block aluminium frame – general view


- → made of extruded aluminium, non-welded, assembled by corner connectors
- → equipped with a rubber gasket, factory-fitted
- → equipped with intumescent gasket for fire doors or EPDM gasket for non-fire doors; installed on site
- → resistant to corrosion in humid conditions
- → powder coated to any RAL palette colour

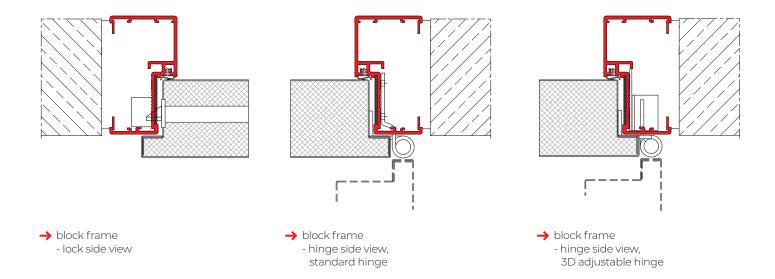

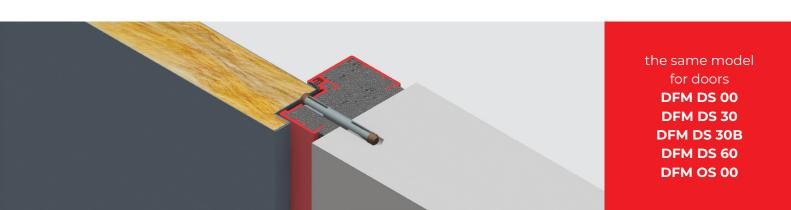


#### **CORNER FRAME with thermal break**






→ corner aluminium frame with thermal break – general view


- → made of extruded aluminium, non-welded, assembled by corner connectors
- → formed to hold polyamide band as thermal break
- → equipped with a rubber gasket, factory-fitted
- equipped with intumescent gasket for fire doors or EPDM gasket for non-fire doors; installed on site
- → resistant to corrosion in humid conditions
- → powder coated to any RAL palette colour




- → corner frame with thermal break
  - lock side view
  - wall notched size 20 x 30 x 170 mm



- corner frame with thermal breakhinge side view,
  - standard hinge



- → corner frame with thermal break
  - hinge side view,3D adjustable hinge
  - wall notched size 20 x 30 x 150 mm

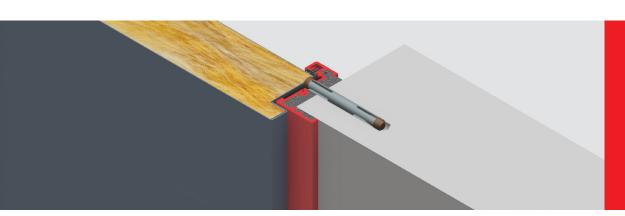


the same model for doors DFM DS 00 DFM DS 30 DFM DS 30B DFM DS 60 DFM DS 60B-1 DFM OS 00

NOTE! Door frame and installation gap to be duly filled, in accordance with certificate

www.dfm-europe.eu → 20.**2.2.1** 


#### **EMBRACING FRAME with thermal break**






→ embracing aluminium frame with thermal break – general view


- → made of extruded aluminium, non-welded, assembled by corner connectors
- → composed of two parts: base element and embracing part made of aluminium or steel depending on wall thickness
- base part formed to hold polyamide band
   as thermal break
- → equipped with a rubber gasket, factory- fitted
- → equipped with intumescent gasket for fire doors or EPDM gasket for non-fire doors; installed on site
- → resistant to corrosion in humid conditions
- → powder coated to any RAL palette colour



- → embracing frame with thermal break
  - lock side view
  - wall notched size 20 x 30 x 170 mm




- → embracing frame with thermal break
  - hinge side view, standard hinge



- → embracing frame with thermal break
  - hinge side view,3D adjustable hinge
  - wall notched size


20 x 30 x 150 mm

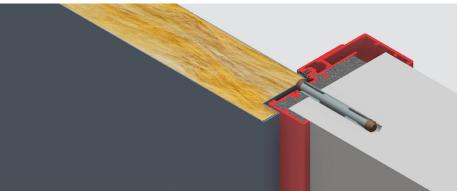

the same model for doors DFM DS 00 DFM DS 30 DFM DS 30B DFM DS 60 DFM DS 60B-1 DFM OS 00


## **BLOCK FRAME with thermal break**






→ block aluminium frame with thermal break – general view

- → made of extruded aluminium, non-welded, assembled by corner connectors
- → formed to hold polyamide band- as thermal break
- → equipped with a rubber gasket, factory-fitted
- → equipped with intumescent gasket for fire doors or EPDM gasket for non-fire doors; installed on site
- → resistant to corrosion in humid conditions
- → powder coated to any RAL palette colour

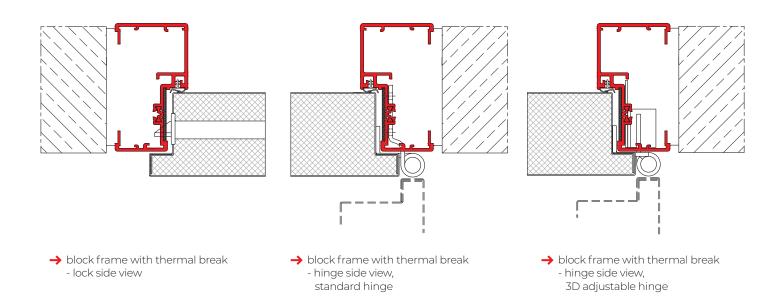

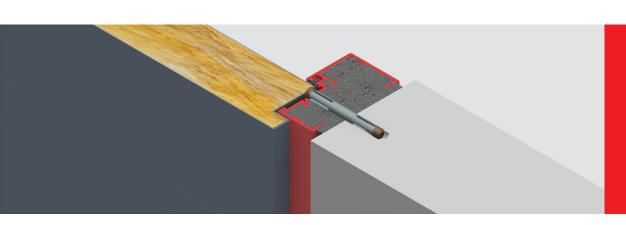


the same model for doors DFM DS 00 DFM DS 30 DFM DS 30B DFM DS 60 DFM DS 60B-1 DFM OS 00

NOTE! Door frame and installation gap to be duly filled, in accordance with certificate

www.dfm-europe.eu → 20.**2.2.3** 


## **CORNER FRAME**






- → made of steel, thickness 1.5 mm, welded
- → equipped with a rubber gasket, factory-fitted
- → equipped with intumescent gasket; installed on site
- → resistant to corrosion in humid conditions
- → powder coated to any RAL palette colour


→ corner steel frame – general view



- → corner steel frame
  - lock side view
  - wall notched size 20 x 30 x 170 mm



- → corner steel frame
  - hinge side view, 3D adjustable hinge
  - wall notched size 20 x 30 x 150 mm

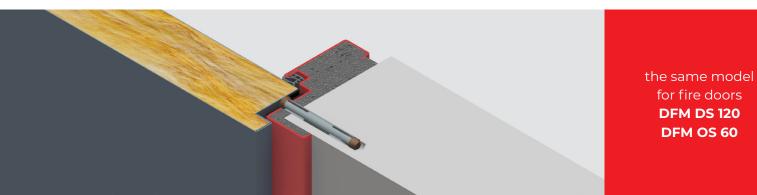


NOTE! Door frame and installation gap to be duly filled, in accordance with certificate

→ 20.**2.3.1** 


## **EMBRACING FRAME**






- → made of steel, thickness 1.5 mm, welded
- → composed of two parts, base element and embracing part made of steel
- → equipped with a rubber gasket, factory-fitted
- → equipped with intumescent gasket; installed on site
- → resistant to corrosion in humid conditions
- → powder coated to any RAL palette colour


→ embracing steel frame – general view



- → embracing steel frame
  - lock side view
  - wall notched size  $20 \times 30 \times 170 \text{ mm}$




- → embracing steel frame
  - hinge side view, 3D adjustable hinge
  - wall notched size  $20 \times 30 \times 150 \text{ mm}$

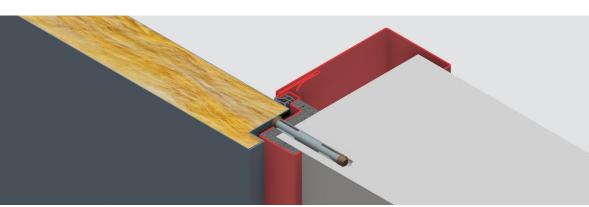

the same model for fire doors DFM DS 120 DFM OS 60


## **BLOCK FRAME**







- → made of steel, thickness 1.5 mm, welded
- → equipped with a rubber gasket, factory-fitted
- → equipped with intumescent gasket; installed on site
- → resistant to corrosion in humid conditions
- → powder coated to any RAL palette colour

→ block steel frame – general view








the same model for fire doors
DFM DS 120
DFM OS 60


# **CORNER FRAME with hidden rebate (HP)**






→ corner aluminium frame for doors with hidden rebate – general view


- → made of extruded aluminium, non-welded, assembled by corner connectors
- → shaped to hide door leaf rebate
- → equipped with a rubber gasket, factory-fitted
- → equipped with intumescent gasket for fire doors or EPDM gasket for non-fire doors; installed on site
- → resistant to corrosion in humid conditions
- → powder coated to any RAL palette colour



→ corner frame for doors with hidden rebate - lock side view




→ corner frame for doors with hidden rebate - hinge side view, standard hinge



→ corner frame for doors with hidden rebate - hinge side view, 3D adjustable hinge

- wall notched size 20 x 30 x 150 mm

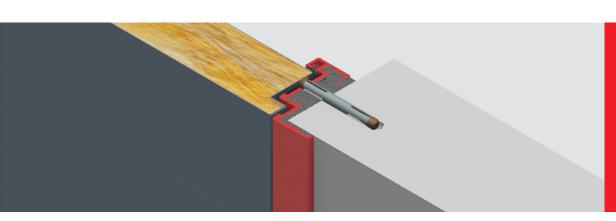


the same model for doors DFM DS HP 00 DFM DS HP 30 DFM DS HP 30B DFM DS HP 60 DFM OS HP 00

NOTE! Door frame and installation gap to be duly filled, in accordance with certificate

www.dfm-europe.eu → 20.**2.4.1** 


#### **EMBRACING FRAME with hidden rebate (HP)**






→ embracing aluminium frame for doors with hidden rebate – general view


- → made of extruded aluminium, non-welded, assembled by corner connectors
- → shaped to hide door leaf rebate
- → composed of two parts: base element and embracing part made of aluminium or steel depending on wall thickness
- → equipped with a rubber gasket, factory-fitted
- → equipped with intumescent gasket for fire doors or EPDM gasket for non-fire doors; installed on site
- → resistant to corrosion in humid conditions
- → powder coated to any RAL palette colour




- → embracing frame for doors with hidden rebate
  - lock side view



- embracing frame for doors with hidden rebate
  - hinge side view, standard hinge



- embracing frame for doors with hidden rebate
  - hinge side view,3D adjustable hinge
  - wall notched size 20 x 30 x 150 mm

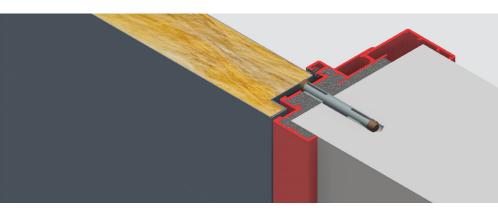


the same model for doors DFM DS HP 00 DFM DS HP 30 DFM DS HP 30B DFM DS HP 60 DFM OS HP 00

NOTE! Door frame and installation gap to be duly filled, in accordance with certificate

www.dfm-europe.eu → 20.**2.4.2** 


# **BLOCK FRAME with hidden rebate (HP)**






→ block aluminium frame for doors with hidden rebate – general view

- → made of extruded aluminium, non-welded, assembled by corner connectors
- → shaped to hide door leaf rebate
- → equipped with a rubber gasket, factory-fitted
- equipped with intumescent gasket for fire doors or EPDM gasket for non-fire doors; installed on site
- → resistant to corrosion in humid conditions
- → powder coated to any RAL palette colour

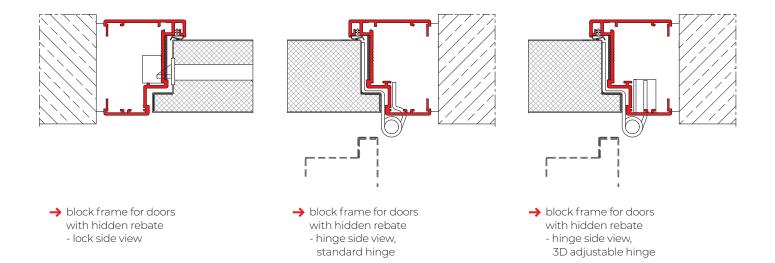

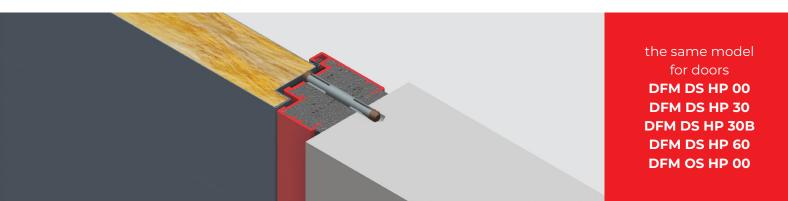

NOTE! Door frame and installation gap to be duly filled, in accordance with certificate

→ 20.**2.4.3**