


STANDARD 3-POINT LOCK

- 3-point lock (BMH) side locking, for doors DFM DS 00 / DFM DS 30 / DFM DS 30B / DFM DS 60 / DFM DS 60B-1 / DFM OS 00
- construction: mortise, 1 pc of main lock and 2 pcs of ancillary locks connected by vertical flat cord
- all locks made of galvanised steel; foreplate 24 mm, rounded, stainless steel
- main lock equipped with latch and deadbolt, PZ cylinder
- ancillary locks closing on deadbolts
- size (dormmass): 65 mm/72 mm, square: 9 mm
- compatible with fittings: handle-handle, knob-handle


3 point
mortise lock




STANDARD 3-POINT LOCK

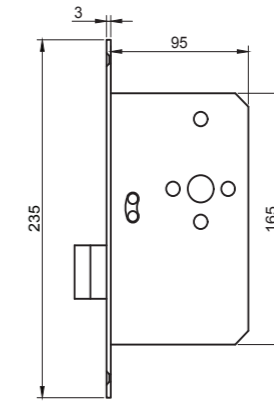

→ ancillary lock

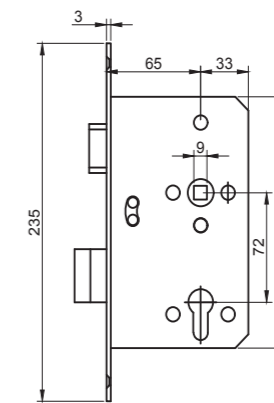


→ main lock

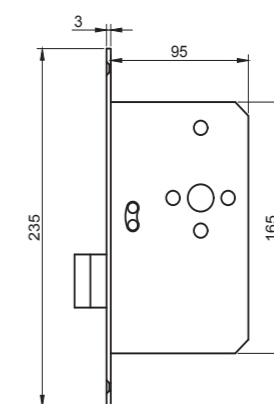


→ ancillary lock




→ rod

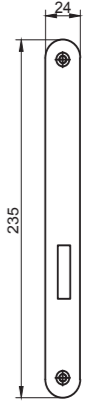

→ fore-plate of lock

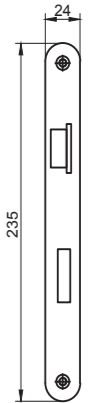

→ fore-plate of lock

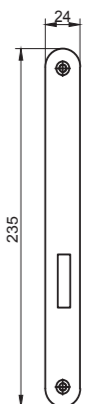

→ fore-plate of lock


PANIC 3-POINT LOCK function D, E

- panic 3-point lock brand BMH, side locking, for doors DFM DS 00 / DFM DS 30 / DFM DS 30B / DFM DS 60 / DFM DS 60B-1 / DFM OS 00
- panic functions implemented: D and E
- intended for evacuation routes: emergency exit locking (EN 179)
- construction: mortise, 1 pc of main lock and 2 pcs of ancillary locks connected by vertical flat cord
- ancillary locks closed on deadbolts
- all locks made of galvanised steel; foreplate 24 mm, rounded, stainless steel
- main lock equipped with latch and deadbolt, PZ cylinder
- size (Dornmass): 65 mm/72 mm, square: 9 mm
- compatible with fittings: handle-handle, knob-handle, handle-panic bar, knob-panic bar


intended
for emergency
exits in concordance
with EN 179




PANIC 3-POINT LOCK function D, E

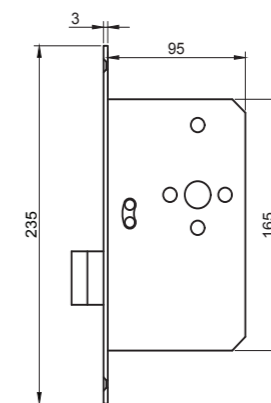

→ ancillary lock

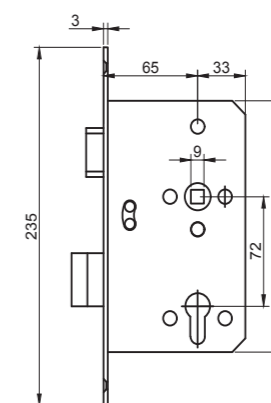

→ main lock

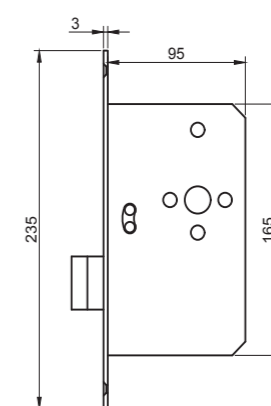

→ ancillary lock




→ rod



→ fore-plate of lock



→ fore-plate of lock



→ fore-plate of lock